


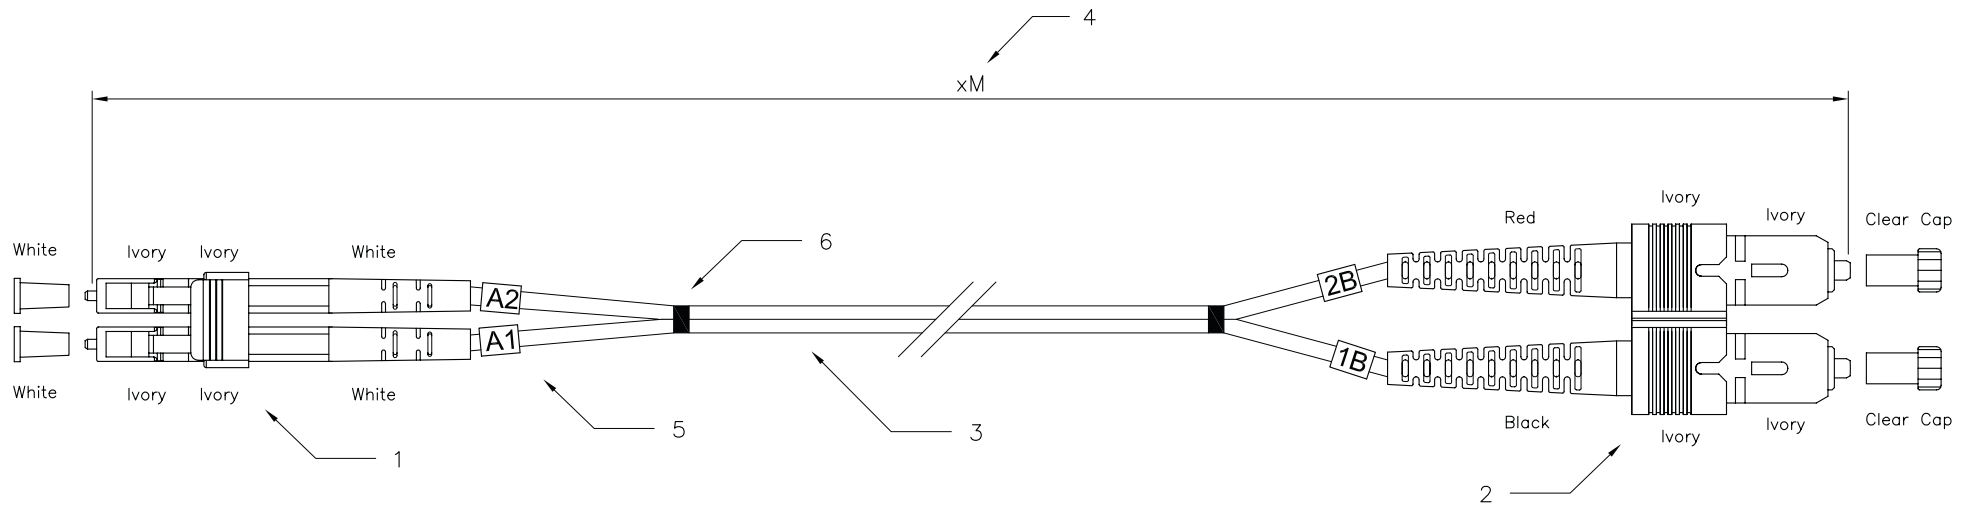

Specification:

1. Connector Type: LC/PC Multimode
2. Connector Type: SC/PC Multimode
3. Cable Type:
Zipcord cable, ϕ 3.0mm 50/125 μ m Multimode,
Cable Jacket: color/gray, material/Low Smoke Zero Halogen (LSOH)
4. Length: xM = 1m, 2m, 3m, 5m, 10m, 20m
5. Cable Marker
6. Shrink Tube

Performance:

- a. Insertion Loss: < 0.5 dB
- b. Fiber Extension: $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- c. Ferrule End-face Radius $10 < R < 30\text{mm}$
- d. Apex Offset: < 50 μm
- e. Increase in insertion loss after 500 mating: 0.2 dB max.
- f. Operation Temperature: -20° to + 70°C
- g. Storage Temperature -40° to +80°C
- h. Humidity (non-condensing) 95% RH

254311	->	1.0m
254312	->	2.0m
254313	->	3.0m
254315	->	5.0m
254316	->	10.0m
254318	->	20.0m

GENERAL TOLERANCE OF DIMENSIONS

X.XXX	±0.005
X.XX	±0.05
X.X	±0.1



Fiber Optic Patch Cord Duplex SC/LC 50/125 μ gray, LSOH